

# 5 REASONS TO CHOOSE THE FIGHTER EURO VI

**F**ULL PNEUMATIC BRAKES FOR WORLD CLASS DRIVING COMFORT  
Adjustable air suspension driver seat and powerful braking with its full pneumatics brake.

**I**MPROVED EFFICIENCY AND TORQUE  
Reputable 6-Turbo 6M60 Engine that enhances fuel economy and power for heavier loads.

**G**REATLY CONFIGURABLE  
The tough and durable chassis fits almost any type of body, making it suitable for any business needs.

**H**IGH GVW  
FK Series (4x2): 11.9 tonnes  
FM Series (4x2): 16 tonnes

**T**RUSTED FEATURES TO KEEP YOU SAFE  
Front Underrun Protection (FUP), Anti-lock Brake System (ABS), Easy Go (EZGO), Brake Override System, Discharge Headlamps, Retractable Composite Curved Side Mirror, Rugged Cab Style.



Scan to view our E-Brochure

## FIGHTER

# VERSATILITY FOR ANY APPLICATION

MEDIUM-DUTY | EURO VI



MITSUBISHI FUSO Authorized Distributor

## Goldbell

Booking Hotline: 9111 0007

8 Tuas Ave 18 Singapore 638892 | Tel: 6861 0007 | www.goldbell.com.sg



# EFFICIENCY

## RUGGED AND DURABLE CHASSIS

### // VERSATILITY FOR ANY APPLICATION


Build to last, this tough, durable chassis is built with no protruding parts to simplify installing the body of your choice, making it suitable for any business needs.

## SIMPLE MAINTENANCE FOR TRUCKS DRIVING PROFIT

### // EASY ACCESS FRONT PANEL

### // TILTABLE CAB

### // RUST-RESISTANT ELECTROPLATED UNDERCOATING

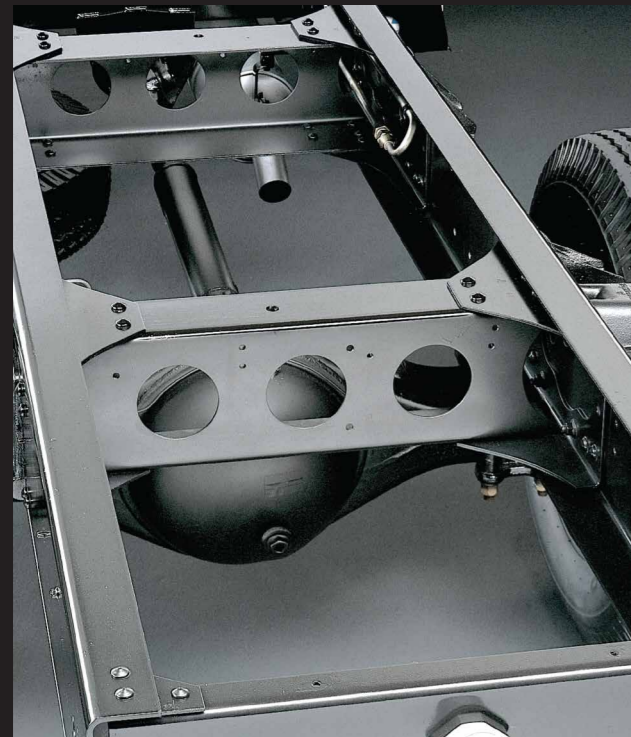

# EFFICIENCY

## TOP CLASS FUEL ECONOMY AND ENVIRONMENTAL PERFORMANCE BlueTec® Technology

### // HIGH PERFORMANCE 6 TURBO 6M60 ENGINE

- EGR cooler for enhanced cooling performance
- VG Turbo with high supercharging effect
- Common rail type high pressure fuel injection system that reduces fuel emissions and improve fuel economy
- Relaxed displacement and high torque that allows powerful pick up with reduced engine load.

### // REGENERATIVE CONTROL TYPE DPF

- Suppressed oil dilution
- Maintenance-free filter
- Extended auto and manual playback interval

### // BLUETEC® EXHAUST AFTERTREATMENT DEVICE

- Reduces NOx emissions
- Environmentally-friendly



# COMFORT

## A STYLISH & FUNCTIONAL CAB FOR YOUR COMFORT

### // INTERIOR & COCKPIT

- High Quality Interior With More Cushioning And Support.
- Less Fatigue, More Comfort.



# SAFETY

## YOUR PARTNER IN SAFETY

// BRAKE OVERRIDE SYSTEM

// RUGGED CAB STYLE

// FRONT UNDERRUN PROTECTION (FUP)

// DISCHARGE HEADLAMP

// ANTI-LOCK BRAKING SYSTEM (ABS)

// EASY GO (EZGO)

# FIGHTER EURO VI

SERIES		FM65			
Model		FM65FM6RDEA			
Type		Forward Control			
Drive System		4 x 2			
Seating Capacity		1 Driver and 2 Passengers			

Dimensions(mm)		M	L	J	H
Wheelbase	WB	5,550	5,080	4,620	4,280
Overall Length	OAL	9,325	9,365	8,635	8,085
Overall Width	OW	2,470			
Overall Height	OH	2,680			
Front overhang	FOH	1,245			
Rear overhang	ROH	2,530	3,040	2,770	2,560
Tread	Front	1,925			
	Rear	1,850			

WEIGHTS (kg)		M	L	J	H
Max G.V.W.		16,000			
Front		6,300			
Rear		10,200			
Kerb Weight		5,050	4,935	4,830	4,745

PERFORMANCE		M	L	J	H
Max speed	km/h	60km/h			
Max gradeability	%	37.2			
Min turning radius	m	9.2	8.5	7.8	7.3


Engine					
Model		6M60-CAT6			
Type		4 stroke-cycle water cooled direct injection turbo charged diesel engine			
No. of cylinder		6, in-line			
Bore and stroke	mm	118mm x 115mm			
Compression ratio		16:1			
Piston displacement	cm <sup>3</sup>	7,545			
Max output power	kW(PS) / rpm	199 (270) / 2,500			
Max torque	Nm (kgfm) / rpm	785 (80) / 1200-2100			
Generator		24V, 80 Amp			
Governor		Electronic control governor			

Drive Line					
Clutch		Hydraulic control, coil spring type, single dry plate with air pressure assistance			
Transmission	Model	M070S6 Manual Transmission			
	Type	6 forward and 1 reverse speed			

Chassis					
Axle		Front: Reverse Elliot, "I" beam type   Rear: Single reduction, hypoid gear			
Tire		Front, single : 11R22.5   Rear, dual : 11R22.5			
Steering		Ball nut type with integral type hydraulic power booster, Telescopic and tilt steering column with steering lock.			
Suspension		Front: Leaf springs with shock absorbers   Rear: Laminated leaf springs			
Brake system		Service: Full air, dual circuit, ABS   Front: Drum   Rear: Drum   Parking: Spring loaded type on rear wheels by hand control valve   Auxiliary: Exhaust brake			
Batteries		12V 80Ah (95E41R) x2			
Adblue Tank Capacity		49 Litres			
Fuel Tank Capacity	litres	200 Litres			

### Note:

- 1 Kerb weight shown are subject to 2.5% variation to allow for production tolerance.
- 2 These specification are subject to change without prior notice, please contact your local FUSO Dealer for detailed specification and equipment available in your market.
- 3 Actual specifications and colors may vary from illustration.

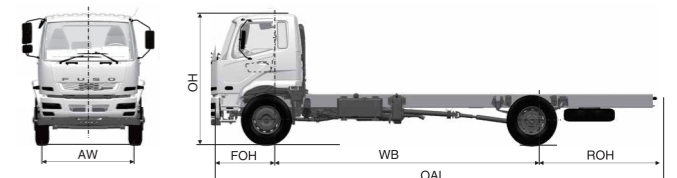

SERIES		FK62F	
Model		FK62FMZ5RDEA	
Type		Forward Control	
Drive System		4 x 2	
Seating Capacity		1 Driver and 2 Passengers	

Dimensions(mm)		M	L	J	H
Wheelbase	WB	5,540	4,870	4,570	3,810
Overall Length	OAL	9,110	8,927	8,447	7,231
Overall Width	OW	2,285			
Overall Height	OH	2,510			
Front overhang	FOH	1,135			
Rear overhang	ROH	2,435	2,922	2,742	2,286
Tread Front	AW	1,775			
Rear	CW	1,710			

WEIGHTS (kg)					
Max G.V.W.		11,900			
Front		5,000			
Rear		9,500			
Kerb weight		4,080	4,010	3,955	3,935


PERFORMANCE					
Max speed	km/h	90 km/h			
Max gradeability	%	46.5			
Min turning radius	m	9.6	8.5	8.1	6.8

Engine					
Model		6M60			
Type		4 stroke-cycle water cooled direct injection turbo charged diesel engine			
No. of cylinder		6, in-line			
Bore and stroke	mm	118mm x 115mm			
Compression ratio		16:1			
Piston displacement	cm <sup>3</sup>	7,545			
Max output power	kW(PS) / rpm	177 (240) / 2,500			
Max torque	Nm (kgfm) / rpm	745 (76) / 1,400			
Generator		24V, 80 Amp			
Governor		Electronic control governor			

Drive Line					
Clutch		Hydraulic control, coil spring type, single dry plate with air pressure assistance			
Transmission	Model	M060S6 Manual Transmission			
	Type	6 forward and 1 reverse speed			

Chassis					
Axle		Front: Reverse Elliot, "I" beam type   Rear: Single reduction, hypoid gear			
Tire		Front, single : 245/70R 19.5   Rear, dual : 245/70R 19.5			
Steering		Ball nut type with integral type hydraulic power booster			
Suspension		Front: Leaf springs with shock absorbers and Stabilizer   Rear: Laminated leaf springs			
Brake system		Service: Full air, dual circuit, ABS   Front: Drum   Rear: Drum   Parking: Spring loaded type on rear wheels by hand control valve   Auxiliary: Exhaust brake			
Batteries		12V 60AH x2			
Adblue Tank Capacity		23 Litres			
Fuel Tank Capacity	litres	200 Litres			

Note:  
 1 Kerb weight shown are subject to 2.5% variation to allow for production tolerance.  
 2 These specification are subject to change without prior notice, please contact your local FUSO Dealer for detailed specification and equipment available in your market.  
 3 Actual specifications and colors may vary from illustration.

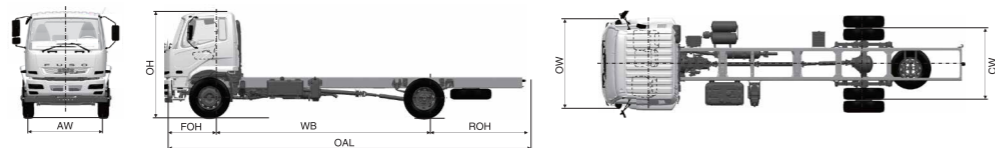

# GOLDBELL CARE


SUPPORTING YOU, EVERY STEP OF THE WAY

## STANDARD

3 years warranty or 100,000km, whichever comes first  
 Fuel card with 20% discount

## OPTIONS

- Telematics/GPS
- Front & Reverse Camera
- Maintenance Packages
- Capped Cost Maintenance
- Extended Warranty

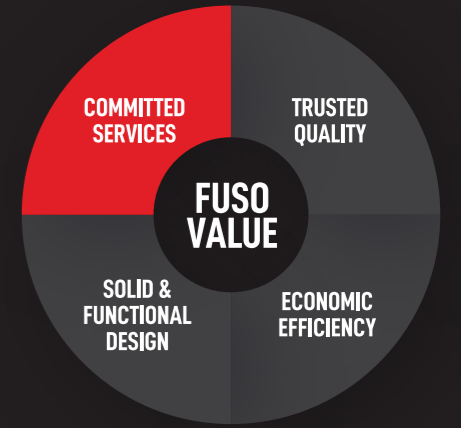

## AFFORDABLE MAINTENANCE REPAIRS



VALUE MAINTENANCE CONTRACT



REPAIRS INSURANCE SCHEME



COMPONENT REMAN



SUPER VALUE REPAIRS PROGRAM

## MAXIMISE VEHICLE UPTIME



READY STOCK PARTS



GOLDBELL CERTIFIED MAINTENANCE



SPECIALISED AFTERSALES PERSONEL



EXPRESS SERVICE




TECHNICAL SHARING




DRIVER TRAINING


## ONE STOP SERVICES




24/7 ROADSIDE ASSISTANCE



FUEL CARD DISCOUNT




VEHICLE HEALTH EVALUATION




TYRE CARE




BODY REPAIR AND PAINTING



REFURBISHMENT PROGRAM



MOTOR CLAIMS



INSURANCE RENEWAL

8 Tuas Ave 18  
 6864 0698

Monday to Friday: 8:30am to 5:30pm  
 Saturday: 8:30am to 12:30pm | Sun/PH: Closed

48 Changi South St 1  
 6592 8860

14 Benoi Road- Parts Depot  
 6864 0910

24-Hr Breakdown Hotline  
 9128 5667

Accident Support Hotline  
 9755 7336



Scan to view our E-Brochure